

SA35/SA45




USB Update Instructions

Required Materials:

- Blank USB stick FAT32 formatted, up to 8Gb recommended.

Instructions:

- Unzip and copy the unzipped file (named **image.swu**) to the USB stick.
- Power on the SA35/SA45 and allow it to boot until the Presets are displayed.
- Plug the USB stick into the back of the SA35/SA45.
- Using the remote control, open the settings menu.

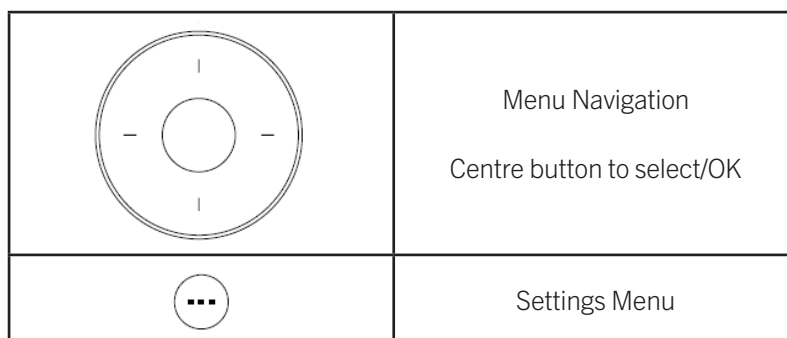

- In the settings menu, navigate up/down the menu to “USB Update”.
- Press the centre button of navigation pad to select this option, and again to confirm and start the update.
- The SA35/SA45 will begin the update. During the process, the display can go blank for up to 5 minutes.

Do not remove power from the SA35/SA45 during this process

- Once complete the unit will restart and the USB stick can be removed.

V1.12.9

Release date: August 12th, 2026

System Software Version: 1.12.9.0xd8eeaf6

Host Software Version: 01.45

System UI Version: 2.5

- Added Loudspeaker AEQ profile selection in the Settings Menu.
- Pressing left or right on remote when in Now Playing Screen will jump to input selection.
- Improvements to RS232 & TCP controls

V1.10.2

Release date: December 18th, 2025

System Software Version: 1.10.2.0x7b4b702

Host Software Version: 01.21

System UI Version: 2.2

- New functionality: Input renaming
- New functionality: RS232&TCP Tunnelling implementation
- Added medium brightness level between high and low levels
- Input carousel starts from current input
- Improved eARC audio handling
- Improved DSD file handling in the Radia App
- Improved Airplay & Cast audio pipeline with Dirac in 2.1 or 2.2 configurations

V1.8.4

Release date: September 17th, 2025

System Software Version: 1.8.4.0x74d9470

Host Software Version: 01.12

System UI Version: 1.10

- Add Subwoofers to Dirac Live along with other improvements
- Add the ability to browse presets from the front panel input dial
- Streaming not interrupted by enabling or disabling Dirac
- Updated display rendering
- Adjusted Bluetooth Output Volume
- Web UI updated to HTTPS

V0.47.1

Release date: June 3rd, 2025

System Software Version: 0.47.1.0x25d958c

Host Software Version: 00.51

System UI Version: 122

- Add Qobuz Connect
- Add Show/Hide inputs feature
- Correct input NPS shown for external inputs when Dirac Live is enabled.

V0.44.4

Release date: April 16th, 2025

System Software Version: 0.44.4.0x6f9c9f3

Host Software Version: 00.49

System UI Version: 0.118

- Improved HDMI eARC/ARC functionality
- Improved handling of Dirac filter deletion
- Coming out of standby on a digital input with Dirac enabled no longer results in no audio
- Bluetooth output is not blocked after using the Bluetooth input.
- Default presets changed

V0.43.0

Release date: March 20th, 2025

System Software Version: 0.43.0.0x3ffb728

Host Software Version: 00.48

System UI Version: 0.116

- 1st release